

# APRS Telemetry Toolkit

---

Rough Draft July 23, 2015

## CONTENTS

1	Introduction .....	2
1.1	Required software.....	2
2	Data Formats.....	4
2.1	Original Telemetry Report Format.....	4
2.2	Base 91 compressed format .....	4
3	Metadata.....	6
3.1	Parameter Name Message.....	6
3.2	Unit/Label Message .....	6
3.3	Equation Coefficients Message.....	6
3.4	Bit Sense / Project Name Message .....	7
4	Balloon Example.....	8
4.1	Historical data .....	8
4.2	Let's try to replicate it.....	9
4.3	Verification.....	9

# 1 Introduction

Many people have asked about how to send telemetry with Dire Wolf. This collection of scripts and examples will provide the building blocks that can be used to construct customized solutions for your particular needs.

To enhance your learning experience, you are encouraged to work along with the examples here and experiment with your own variations. Disconnect any transmitter to avoid sending anything inappropriate over the air.

## 1.1 Required software

- Dire Wolf, version 1.3 or later.

At the time this is being written, 1.2 is the latest release. The examples here use some new features in version 1.3 which has not yet been released at the time this is being written. Download it from this hidden location:

Windows, prebuilt:

<http://home.comcast.net/~wb2osz/Version%201.3/direwolf-1.3-dev-E-win.zip>

Source for Linux:

<http://home.comcast.net/~wb2osz/Version%201.3/direwolf-1.3-dev-E-src.zip>

- APRS Telemetry Toolkit

This is bundled in with Dire Wolf version 1.3 and later. It is composed of the following files:

Name	Purpose	Linux Location
telem-bits.pl telem-eqns.pl telem-parm.pl telem-unit.pl	Generic scripts for sending metadata which describes the data.	/usr/local/bin
telem-data.pl telem-data91.pl	Convert data values to original telemetry and more recent compressed format.	/usr/local/bin
telem-m0xer-3.txt	Actual historical data captured and used for balloon example.	\$HOME
telem-balloon.conf	Configuration file used for reenactment of the historical event.	\$HOME
telem-balloon.pl	Script used for reenactment. This uses hard coded values for a demonstration. In practice it would obtain values from sensors.	/usr/local/bin

APRS-Telemetry-Toolkit.pdf	This document.	/usr/local/share/direwolf/doc
----------------------------	----------------	-------------------------------

In the Windows version, all of the files are placed in a single directory when extracting from the zip file.

- Perl

For Microsoft Windows, I happen to be using the version from here: <http://strawberryperl.com/> Other versions will probably work as well.

For Linux, perl is probably already there. If not install it:

Debian / Ubuntu / Raspbian: `sudo apt-get install perl`

Red Hat / Fedora / CentOS: `sudo yum install perl`

## 2 Data Formats

First, let's quickly review the fundamentals of APRS Telemetry. The specification is found in the **APRS Protocol Reference**, <http://www.aprs.org/doc/APRS101.PDF> , chapter 13.

### 2.1 Original Telemetry Report Format

The original format used fixed width columns like this:

```
T#xxx,aaa,aaa,aaa,aaa,aaa,bbbbbbbb
```

Where,

T	is the data type indicator for Telemetry data.
xxx	is a sequence number.
aaa	are up to 5 analog values in the range of 000 to 255.
bbbbbbbb	is an 8 bit binary number for single bit digital values.
	All analog values must be present to use the digital values.

In reality, no one pays attention to the requirement for fixed with fields or the analog value range. Much longer numbers with decimal points are often seen and all of the applications I looked at know how to deal with this.

The toolkit contains a script to combine the command line arguments into the proper format. Using an example from the Protocol Reference,

```
$ telem-data.pl 005 199 000 255 073 123 01101001
T#005,199,000,255,073,123,01101001
```

### 2.2 Base 91 compressed format

In 2012, a new compressed format was introduced.  
<http://he.fi/doc/aprs-base91-comment-telemetry.txt>

Rather than sending telemetry in its own packet, this is inserted into the comment part of a Position Report. It can be recognized by the vertical bar at the beginning and end. Inside are pairs of characters representing integers in the range of 0 to 8280.

```
|ssaaaaaaaaadd|
```

Where,

ss	is the sequence number
aa	are 1 to 5 analog values.
dd	contains 8 bit values and some left over space.
	Again, all analog values must be present before using the digital values.

Examples of script usage:

```
$ telem-data91.pl 7458 4521 587 2649 7  
|rxR_'J>+! (|
```

```
$ telem-data91.pl 7544 1472 1564 1656 1748 1840 10000000  
|ss1122334455!"|
```

### 3 Metadata

Numbers alone are not very informative. Does it represent battery voltage, river water level, or a Field Day score? Is the Jacuzzi temperature 100 degrees Fahrenheit or Celsius? In the cases where only integers, of a limited range, are available, some sort of scaling is necessary.

This information is sent as “Messages” in a specific format. All of them include the callsign of the station sending telemetry, and a type identifier.

```
:call-ssid:PARM. (names for up to 5 analog and 8 digital channels)
:call-ssid:UNIT. (units for analog or labels for digital channels)
:call-ssid:EQNS. (equation coefficients for scaling values)
:call-ssid:BITS. (bit polarity and project title)
```

Consult the APRS Protocol Reference for more details. Here are brief descriptions of the scripts provided to generate these messages.

#### 3.1 Parameter Name Message

The Parameter Name Message contains the names of the 5 analog and 8 digital channels.

Example Protocol Reference:

```
$ telem-param.pl N0QBF-11 Battery Btemp ATemp Pres Alt Camra Chut Sun 10m ATV
:N0QBF-11 :PARM.Battery,Btemp,ATemp,Pres,Alt,Camra,Chut,Sun,10m,ATV
```

#### 3.2 Unit/Label Message

The Unit/Label Message contains the units for the analog values and labels for digital channels.

Example Protocol Reference:

```
$ telem-unit.pl N0QBF-11 v/100 deg.F deg.F Mbar Kft Click OPEN on on hi
:N0QBF-11 :UNIT.v/100,deg.F,deg.F,Mbar,Kft,Click,OPEN,on,on,hi
```

#### 3.3 Equation Coefficients Message

The Equation Coefficients are used to expand limited range integer values into more convenient units.

Example Protocol Reference:

```
$ telem-eqns.pl N0QBF-11 0 5.2 0 0 .53 -32 3 4.39 49 -32 3 18 1 2 3
:N0QBF-11 :EQNS.0,5.2,0,0,.53,-32,3,4.39,49,-32,3,18,1,2,3
```

### 3.4 Bit Sense / Project Name Message

This message defines bit polarity and an optional title for the project.

Example Protocol Reference:

```
$ telem-bits.pl N0QBF-11 10110000 "N0QBF's Big Balloon"  
:N0QBF-11 :BITS.10110000,N0QBF's Big Balloon
```

## 4 Balloon Example

For our first example, we will perform a terse reenactment of an historical event.

### 4.1 Historical data

Here is some actual data gather from a high altitude balloon flight.

```
2E0TOY>APRS::M0XER-3 :BITS.11111111,10mW research balloon
2E0TOY>APRS::M0XER-3 :PARM.Vbat,Vsolar,Temp,Sat
2E0TOY>APRS::M0XER-3 :EQNS.0,0.001,0,0,0.001,0,0,0.1,-273.2,0,1,0,0,1,0
2E0TOY>APRS::M0XER-3 :UNIT.V,V,C,,m
M0XER-3>APRS63,WIDE2-1:!/Bap'.ZGO JHAE/A=042496|E@Q0%i;5!-|
M0XER-3>APRS63,WIDE2-1:!/4\;u/)K$O J]YD/A=041216|h`RY(1>q!(|
M0XER-3>APRS63,WIDE2-1:!/23*f/R$UO Jf'x/A=041600|rxR_'J>+!(|
```

What does it all mean? One way to find out is to put it into a text file and feed it into the “decode\_aprs” utility. I found it interesting that the balloon did not send its own metadata. That was provided by someone else. This required some extra effort to find the information in different places and bring it all together.

```
$ decode_aprs telem-m0xer-3.txt

2E0TOY>APRS::M0XER-3 :BITS.11111111,10mW research balloon
Telemetry Bit Sense/Project Name Message for "M0XER-3", Generic,
(obsolete. Digis should use APNxxx instead)

2E0TOY>APRS::M0XER-3 :PARM.Vbat,Vsolar,Temp,Sat
Telemetry Parameter Name Message for "M0XER-3", Generic, (obsolete.
Digis should use APNxxx instead)

2E0TOY>APRS::M0XER-3 :EQNS.0,0.001,0,0,0.001,0,0,0.1,-
273.2,0,1,0,0,1,0
Telemetry Equation Coefficients Message for "M0XER-3", Generic,
(obsolete. Digis should use APNxxx instead)

2E0TOY>APRS::M0XER-3 :UNIT.V,V,C,,m
Telemetry Unit/Label Message for "M0XER-3", Generic, (obsolete. Digis
should use APNxxx instead)

M0XER-3>APRS63,WIDE2-1:!/Bap'.ZGO JHAE/A=042496|E@Q0%i;5!-|
Position, BALLOON, Generic, (obsolete. Digis should use APNxxx instead)
N 61 34.2876, W 155 40.0931, alt 42496 ft
10mW research balloon: Seq=3307, Vbat=4.383 V, Vsolar=0.436 V, Temp=-
34.6 C, Sat=12
AE

M0XER-3>APRS63,WIDE2-1:!/4\;u/)K$O J]YD/A=041216|h`RY(1>q!(|
Position, BALLOON, Generic, (obsolete. Digis should use APNxxx instead)
N 51 07.4402, W 124 14.4472, alt 41216 ft
10mW research balloon: Seq=6524, Vbat=4.515 V, Vsolar=0.653 V, Temp=-
1.3 C, Sat=7
YD
```



```

MOXER-3>APRS63,WIDE2-1:!/23*f/R$UO Jf'x/A=041600|rxR_'J>+!(|
Position, BALLOON, Generic, (obsolete. Digis should use APNxxx instead)
N 55 58.5558, W 122 28.5933, alt 41600 ft
10mW research balloon: Seq=7458, Vbat=4.521 V, Vsolar=0.587 V, Temp=-
8.3 C, Sat=7
'x

```

If you try doing them one at a time, the metadata history won't be available and it will be displayed as a bunch of plain integers.

```

$ decode_aprs
MOXER-3>APRS63,WIDE2-1:!/23*f/R$UO Jf'x/A=041600|rxR_'J>+!(|

MOXER-3>APRS63,WIDE2-1:!/23*f/R$UO Jf'x/A=041600|rxR_'J>+!(|
Position, BALLOON, Generic, (obsolete. Digis should use APNxxx instead)
N 55 58.5558, W 122 28.5933, alt 41600 ft
Seq=7458, A1=4521, A2=587, A3=2649, A4=7
'x

```

Hmmmm. What are those two extra characters left over for the comment?

## 4.2 Let's try to replicate it

I'm not suggesting that this would be the best tool available for something sent into the Stratosphere, but if you wanted to, here is how you could do it. Two sample configuration files are included because there is a small difference between Windows and Linux. Start up Dire Wolf with the sample configuration file. You

```

$ direwolf -c telem-ballon.conf
...
...
[0L] MOXER-3>APDW13::MOXER-3 :PARM.Vbat,Vsolar,Temp,Sat
[0L] MOXER-3>APDW13::MOXER-3 :UNIT.V,V,C,,m
[0L] MOXER-3>APDW13::MOXER-3 :EQNS.0,0.001,0,0,0.001,0,0,0.1,-
273.2,0,1,0,0,1,0
[0L] MOXER-3>APDW13::MOXER-3 :BITS.11111111,10mW research balloon

[0L] MOXER-3>APDW13,WIDE2-1:!/Bap'.ZGO !/A=042496|E@Q0%i;5!-|
[0L] MOXER-3>APDW13,WIDE2-1:!/4\;u/)K$O !/A=041217|h`RY(1>q!(|
[0L] MOXER-3>APDW13,WIDE2-1:!/23*f/R$UO !/A=041601|rxR_'J>+!(|

```

## 4.3 Verification

How do we know if it is correct? You could feed it into `decode_aprs` as we did before, or better yet, use some other independently developed applications and see if everyone agrees. If you wait a little longer, the sample configuration file will send the same packets again. This time, a new option is added:

```
SENDTO=R0
```


This means don't send the beacons to the transmitter. Instead process them as if they had been received over the radio. This is convenient for testing. You can see what happens if some particular packet is received without having to transmit it from some other system.

*(Here is another idea that might be useful in some situations. Use the beacon "SENDTO=IG" option to send the packets through the IGate function to the APRS-IS servers. This could be used to report telemetry values without a radio link.)*


We will now run three different client applications at the same time and observe what they display when these packets are received. The first one listed has some interesting features like alarms when specified values are exceeded.

- APRS Telemetry Watcher (APRS-TW) <http://aprstw.blandranch.net/>
- APRSISCE/32 <http://aprsisce.wikidot.com/>
- Yet Another APRS Client (YAAC) <http://www.ka2ddo.org/ka2ddo/YAAC.html>


APRS Telemetry Watcher has the expected results.

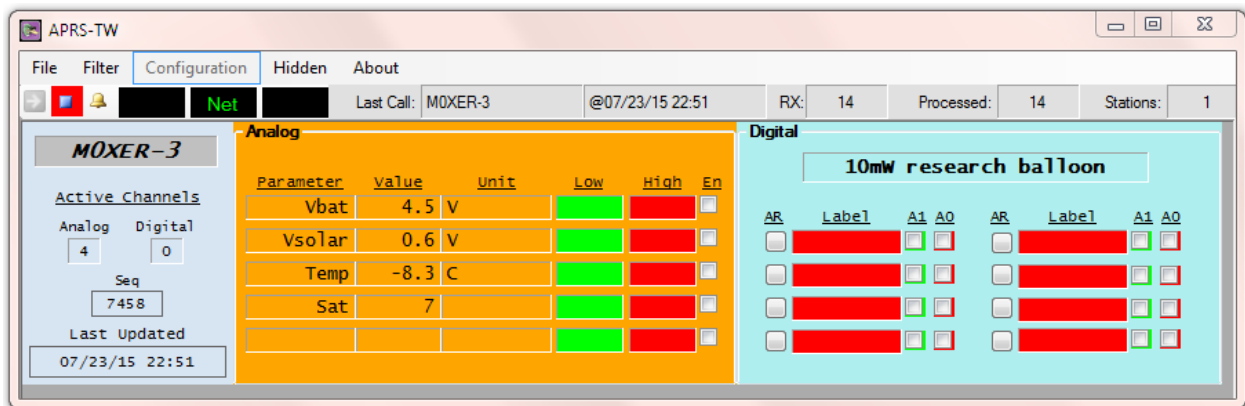

APRSISCE/32 decodes it correctly.

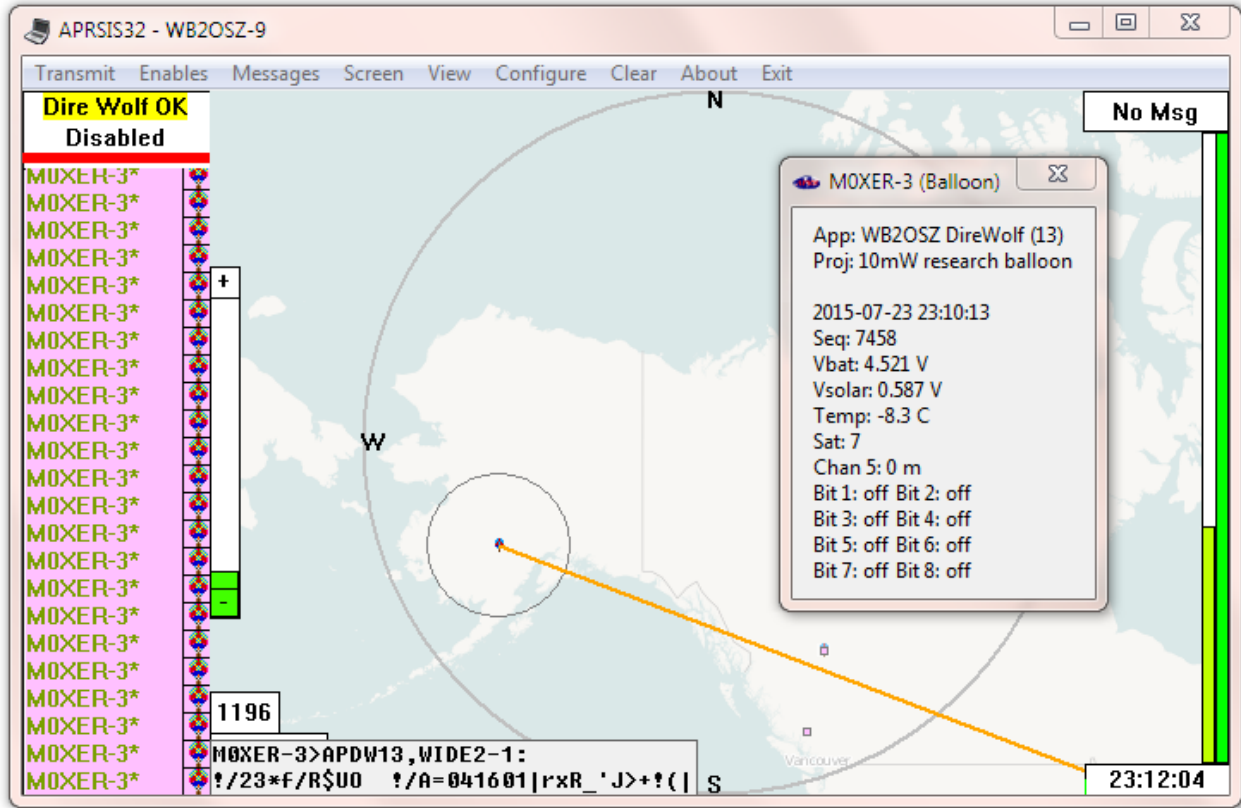


YAAC displays the raw packets coming in.

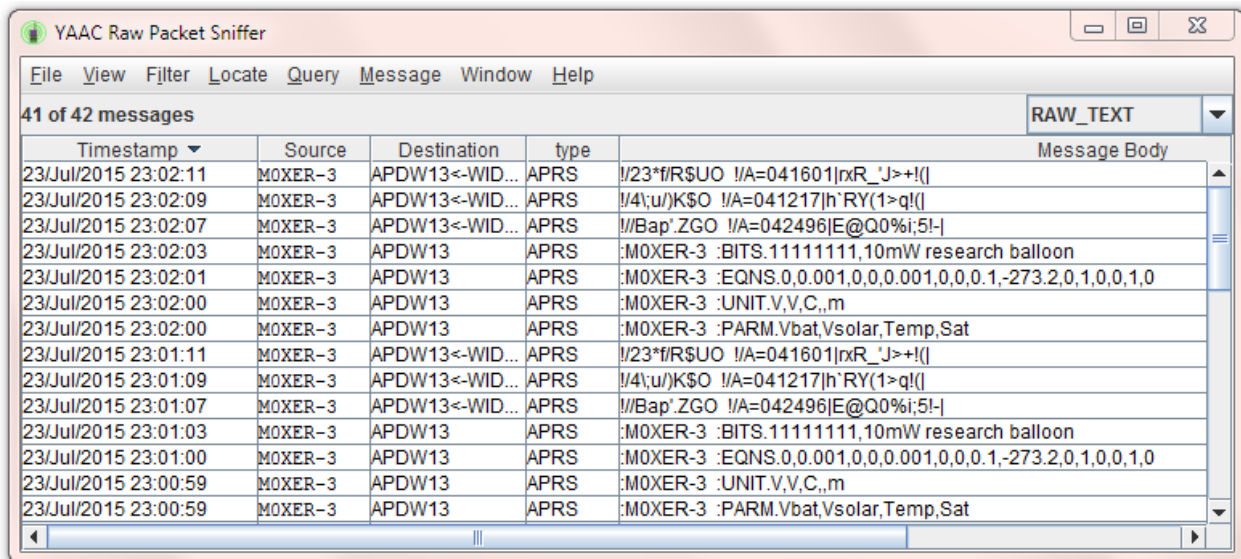

However it doesn't decode the data. Perhaps it does not recognize the compressed format???

**NEED TO UPDATE THIS AFTER IT IS FIXED!**

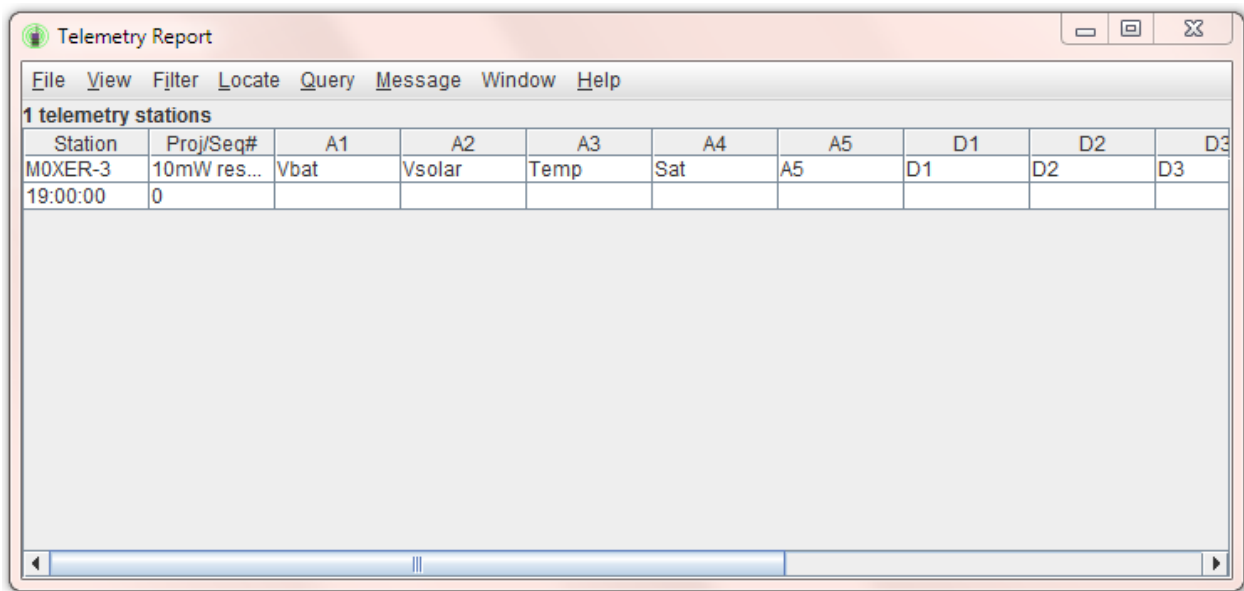

Telemetry Report

File View Filter Locate Query Message Window Help

**1 telemetry stations**

Station	Proj/Seq#	A1	A2	A3	A4	A5	D1	D2	D3
MOXER-3	10mW res...	Vbat	Vsolar	Temp	Sat	A5	D1	D2	D3
19:00:00	0								

